

ADDENDUM NUMBER 2
2022 ASPHALT RESURFACING
PROJECT NUMBER PW-2022-05
04/01/2022

The following changes, modifications, and/or clarifications to the project documents are a part, thereof, and change the original documents only in the manner and to the extent stated.


1. Bidders are reminded to comply with all the requirements for bidding as enumerated in the Project Manual, **INCLUDING ACKNOWLEDGEMENT OF THE RECEIPT OF THIS ADDENDUM ON THE BID FORM.**
2. Reference is made to all plans: Delete prior plans and replace with new plan set attached. New set has engineer's seal and a change on Sheet 13-0003.
3. Question was made to road side grade area. Sheet 13-0003 of the new plan set referenced in item 2 of this addendum has changed Note 2 to reflect area of shoulder grading along Ashland Trail.
4. Question was asked about how manholes and valve boxes were to be adjusted. The answer is that manholes and valves should be able to remain in place and have asphalt evenly sloped around them for a smooth transition.

END OF ADDENDUM NO. 2

TOWN OF TYRONE ENGINEERING AND PUBLIC WORKS

PLAN OF PROPOSED 2022 ROADWAY RESURFACING




PROJECT NUMBER: PW-2021-13-01

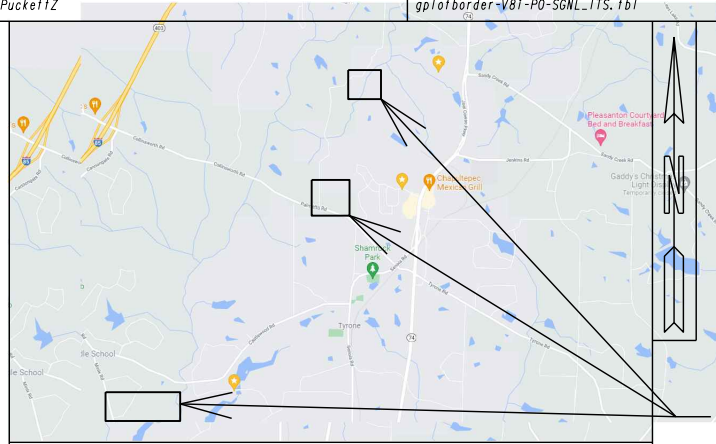

PROJECT LOCATIONS

LOCATION SKETCH

SPEED LIMIT:
 25 MPH (PARK HAVEN LN)
 25 MPH (STONEWYCK DR)
 25 MPH (ASHLAND TRAIL)
 25 MPH (CARRIAGE OAKS DR)
 25 MPH (BRUNSWICK DR)
 25 MPH (MILSFORD CT)

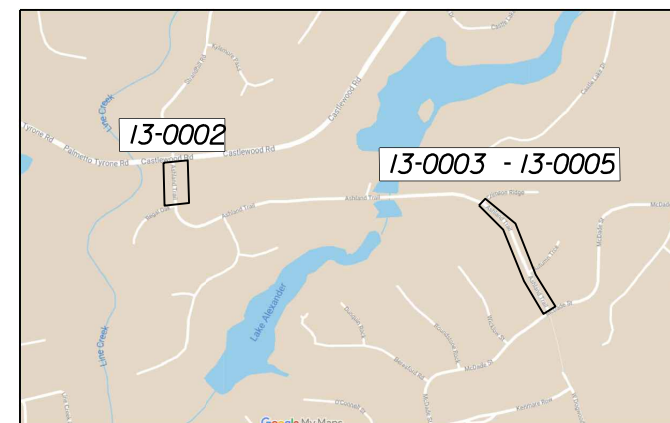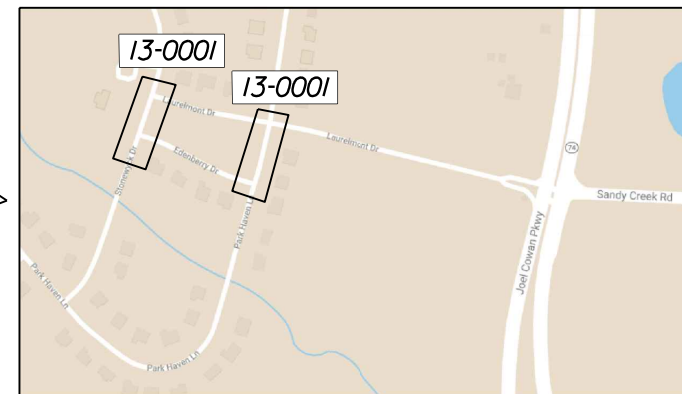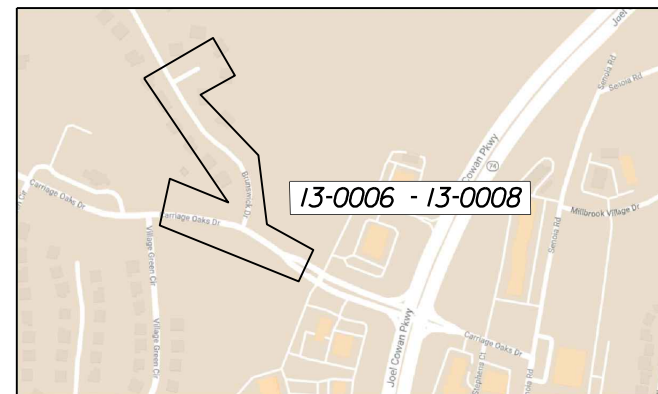

PREPARED BY: _____
DESIGN

NOTE: CURB LINES, PROPERTY LINES AND RIGHT-OF-WAY LIMITS SHOWN ARE APPROXIMATE AND ARE BASED ON CURRENTLY AVAILABLE INFORMATION AND FIELD OBSERVATIONS. THE CONTRACTOR IS RESPONSIBLE FOR LIMITING CONSTRUCTION TO PUBLIC RIGHTS-OF-WAY ONLY AND SHALL NOT ENCROACH UPON PRIVATE PROPERTY WITHOUT LEGAL EASEMENTS. IT IS THE CONTRACTORS RESPONSIBILITY TO VERIFY ALL UTILITIES (HORIZONTAL AND VERTICAL), PROPERTY LINES, AND RIGHTS OF WAY. THE ATTENTION OF THE BIDDER IS DIRECTED SPECIFICALLY TO SUB SECTIONS 102.04, 102.05, AND 104.03 OF THE GDOT SPECIFICATIONS ALL DEVICES, EQUIPMENT, AND MATERIALS INSTALLED SHALL BE INSTALLED WITHIN THE EXISTING RIGHT OF WAY.

THE DATA, TOGETHER WITH ALL OTHER INFORMATION SHOWN ON THESE PLANS OR IN ANYWAY INDICATED THEREBY, WHETHER BY DRAWINGS OR NOTES, OR IN ANY OTHER MANNER, ARE BASED UPON FIELD INVESTIGATIONS AND ARE BELIEVED TO BE INDICATIVE OF ACTUAL CONDITIONS. HOWEVER, THE SAME ARE SHOWN AS INFORMATION ONLY, ARE NOT GUARANTEED, AND DO NOT BIND THE TOWN OF TYRONE IN ANY WAY. THE ATTENTION OF BIDDER IS SPECIFICALLY DIRECTED TO SUBSECTIONS 102.04, 102.05, AND 104.03 OF THE SPECIFICATIONS.



POND

3500 Parkway Lane
Suite 500
Peachtree Corners, Ga. 30092
Phone 678-336-7740
Fax 678-336-7744
Web www.pondco.com

DATE	TOWN ENGINEER
PLANS COMPLETED 03-25-2022	
REVISIONS	

DRAWING No.
01-0001

GENERAL NOTES - RESURFACING

GENERAL NOTES SIGNING AND PAVEMENT MARKING

1. ALL REFERENCES IN THIS DOCUMENT, WHICH INCLUDES ALL PAPERS, WRITINGS, DOCUMENTS, DRAWINGS, OR PHOTOGRAPHS USED, OR TO BE USED, IN CONNECTION WITH THIS DOCUMENT, TO THE STATE HIGHWAY DEPARTMENT OF GEORGIA, STATE HIGHWAY DEPARTMENT, GEORGIA STATE HIGHWAY DEPARTMENT, HIGHWAY DEPARTMENT, OR DEPARTMENT WHEN THE CONTEXT THEREOF MEANS THE STATE HIGHWAY DEPARTMENT OF GEORGIA, SHALL BE DEEMED TO MEAN, THE DEPARTMENT OF TRANSPORTATION.
2. THE DATA, TOGETHER WITH ALL OTHER INFORMATION SHOWN ON THESE PLANS, OR IN ANY WAY INDICATED THEREBY, WHETHER BY DRAWINGS OR NOTES, OR IN ANY OTHER MANNER, ARE BASED UPON FIELD INVESTIGATIONS AND ARE BELIEVED TO BE INDICATIVE OF ACTUAL CONDITIONS. HOWEVER, THE SAME ARE SHOWN AS INFORMATION ONLY, ARE NOT GUARANTEED AND DO NOT BIND THE DEPARTMENT OF TRANSPORTATION IN ANY WAY. THE ATTENTION OF THE BIDDER IS SPECIFICALLY DIRECTED TO SECTIONS 102.04, 102.05, AND 104.03 OF THE SPECIFICATIONS.
3. SELECTED GEORGIA STANDARDS HAVE BEEN ADDED TO THE PLANS FOR THE CONTRACTOR'S USE AND INFORMATION. STANDARDS AND DETAILS ARE AVAILABLE FOR DOWNLOAD AT [HTTP://MYDOCS.DOT.GA.GOV/INFO/GDOTPUBS/CONSTRUCTIONSTANDARDSANDDETAILS/FORMS/ALLITEMS.ASPX](http://MYDOCS.DOT.GA.GOV/INFO/GDOTPUBS/CONSTRUCTIONSTANDARDSANDDETAILS/FORMS/ALLITEMS.ASPX)
4. PERFORM ALL PATCHING AS DIRECTED BY THE ENGINEER, PRIOR TO LEVELING AND RESURFACING OPERATIONS. COMPLETE ALL REMOVAL AND PATCHING OPERATIONS WITHIN THE SAME DAY THEY ARE BEGUN.
5. CONSTRUCTION WASTE OR DEBIS SHALL BE PREVENTED FROM BEING ALLOWED TO FALL OR BE PLACED INTO THE EXISTING WATERWAYS. THE COST FOR THIS WORK SHALL BE INCLUDED IN THE OVERALL BID PRICE OF THE PROJECT.
6. ALL DRAINAGE STRUCTURES WITHIN THE LIMITS OF THE PROJECT WILL BE MAINTAINED THROUGHOUT THE DURATION OF THE PROJECT. ANY DEBRIS THAT GOES IN DRAINAGE STRUCTURES AS A RESULT OF THE MILLING AND INLAY OPERATIONS WILL BE CLEANED OUT AT NO ADDITIONAL COST TO THE CITY.
7. RESTRIPE ALL EXISTING ROADWAY AS INDICATED WITHIN THESE PLANS. RESTRIPE ALL EXISTING ROADWAY MARKINGS ON SIDE ROADS TO THE END OF THE NEW RESURFACED SECTION. ALSO, RESTRIPE OR PAINT (WHERE NOT EXISTING) STOP BARS AT ALL PAVED SIDE ROADS AND STREETS.
8. TEMPORARY STRIPING IS REQUIRED IN ACCORDANCE WITH SECTION 150.04 OF THE GEORGIA SPECIFICATIONS. PLACEMENT OF PERMANENT PAVEMENT MARKINGS SHALL NOT BEGIN UNTIL FINAL SURFACE COURSE HAS BEEN COMPLETED FOR FIFTEEN (15) CALENDAR DAYS AND WILL BE COMPLETED WITHIN FORTY FIVE (45) CALENDAR DAYS AFTER THE FINAL SURFACE COURSE HAS BEEN COMPLETED. FAILURE TO PLACE PERMANENT PAVEMENT MARKINGS AS SPECIFIED WILL RESULT IN LIQUIDATED DAMAGES TO BE ASSESSED IN ACCORDANCE WITH SUBSECTION 108.08 OF THE SPECIFICATIONS.
9. THIS PROJECT DOES NOT REQUIRE A NOI.
10. THE CONTRACTOR SHALL PROTECT ALL MANHOLES AND VALVES WITHIN THE LIMITS OF MILLING & INLAY IN PLACE. SEE TEMPORARY ASPHALT APRON DETAIL SHOWN ON THE TYPICAL SECTIONS FOR PROTECTION AFTER MILLING OPERATIONS HAVE TAKEN PLACE.
11. THE CONTRACTOR SHALL CLEAR ANY GRASS EXTENDING INTO THE ROADWAY, TO A POINT 1 FOOT BEHIND THE EXISTING EDGE OF PAVEMENT. CONTRACTOR SHALL CONTACT THE TOWN OF TYRONE, PRIOR TO BEGINNING CLEARING AND GRUBBING OPERATIONS, THE COST FOR THIS WORK SHALL BE INCLUDED IN THE BID PRICE OF GRADING COMPLETE.
12. THE CONTRACTOR SHALL PROTECT THE EXISTING CURB IN PLACE.
12. WHERE APPLICABLE, CONTRACTOR SHALL ENSURE TOP OF FINISHED ASPHALT SURFACE COURSE IS FLUSH/LEVEL WITH EDGE OF CONCRETE GUTTER.
14. THE CONTRACTOR SHALL PERFORM ALL WORK BETWEEN 8:00 AM AND 6:00 PM. NO NIGHT WORK IS PERMITTED.
15. MILLED AREAS WILL BE COVERED WITH FINAL SURFACE COURSE WITHIN THREE (3) CALENDAR DAYS OF BEING MILLED. CONTRACTOR SHALL ENSURE ALL PROPER SIGNAGE IS INSTALLED AND DISPLAYED DURING CONSTRUCTION.
16. THE CONTRACTOR SHALL ENSURE THAT POSITIVE DRAINAGE IS MAINTAINED DURING ALL STAGES OF CONSTRUCTION SO THAT WATER DOES NOT POND ON THE ROADWAY.
17. THE CONTRACTOR SHALL ENSURE THAT THE FINAL HORIZONTAL ROADWAY CROWN LOCATION IS THE SAME AS THE EXISTING CROWN HORIZONTAL LOCATION.
18. WHERE APPLICABLE, CONTRACTOR SHALL ENSURE SMOOTH TRANSITION AROUND MANHOLES AND VALVES. TOP OF FINISHED ASPHALT SURFACE COURSE SHALL BE FLUSH/LEVEL WITH MANHOLES AND VALVES.
19. ALL WORK SHALL BE DONE IN ACCORDANCE WITH THE DEPARTMENT OF TRANSPORTATION OF GEORGIA STANDARD SPECIFICATIONS FOR THE CONSTRUCTION OF ROADS AND BRIDGES, 2021 (OR LATEST) EDITION AND SUPPLEMENTAL THERETO, AS PROVIDED BY THE FEDERAL HIGHWAY ADMINISTRATION.
20. UTILITY WORK COORDINATION WILL BE REQUIRED AS A PART OF THIS CONTRACT. THE CONTRACTOR SHALL BE REQUIRED TO USE THE ONE-CALL CENTER TELEPHONE NUMBER, 811 OR 1-800-282-7411, FOR THE PURPOSE OF COORDINATING THE MARKING OF UNDERGROUND UTILITIES. THE CONTRACTOR'S ATTENTION IS CALLED TO SUB-SECTION 105.06 OF THE GDOT STANDARD SPECIFICATIONS 'COOPERATION WITH UTILITIES.'
21. THE CONTRACTOR SHALL ENSURE THAT POSITIVE AND ADEQUATE DRAINAGE IS MAINTAINED AT ALL TIMES WITHIN THE PROJECT LIMITS. THIS MAY INCLUDE, BUT NOT BE LIMITED TO, REPLACEMENT OR RECONSTRUCTION OF EXISTING DRAINAGE STRUCTURES THAT HAVE BEEN DAMAGED OR REMOVED, OR REGRADING AS REQUIRED BY THE ENGINEER, EXCEPT FOR THOSE DRAINAGE ITEMS SHOWN AT SPECIFIC LOCATIONS IN THE PLANS AND HAVING SPECIFIC PAY ITEMS IN THE DETAILED ESTIMATE. NO SEPARATE PAYMENT WILL BE MADE FOR ANY COSTS INCURRED TO COMPLY WITH THIS REQUIREMENT.
22. EROSION CONTROL MEASURES SHALL BE INSTALLED PRIOR TO OR CONCURRENT WITH LAND DISTURBANCE ACTIVITIES AND SHALL BE MAINTAINED AT ALL TIMES. ADDITIONAL EROSION AND SEDIMENT CONTROL DEVICES SHALL BE INSTALLED IF DEEMED NECESSARY BY ONSITE INSPECTION OR AS DIRECTED BY THE ENGINEER.
23. AREAS OF DEEP PAVEMENT PATCHING HAVE BEEN IDENTIFIED IN THE PLANS. IN THE EVENT MILLING OPERATIONS EXPOSE ROADWAY BASE, CONTRACTOR IS RESPONSIBLE FOR REPLACING BASE. PAYMENT SHALL BE INCLUDED IN PAY ITEM 210-0100 GRADING COMPLETE.

1. ALL SIGNS AND PAVEMENT MARKINGS SHALL CONFORM TO THE MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES, (MUTCD), LATEST EDITION, AND ANY APPLICABLE GDOT STANDARDS/SPECIFICATIONS.
2. ALL INSTALLATION MATERIALS AND METHODS SHALL COMPLY WITH CURRENT GEORGIA DEPARTMENT OF TRANSPORTATION STANDARDS AND SPECIFICATIONS AND/OR SPECIAL PROVISIONS.
3. ALL PAVEMENTS MARKINGS SHALL BE THERMOPLASTIC, OR PREFORMED PLASTIC CONTRAST TAPE ON CONCRETE SURFACES, UNLESS OTHERWISE NOTED.
4. THE CONTRACTOR SHALL BE RESPONSIBLE FOR THE REMOVAL OF ALL SIGNS/POSTS/PAVEMENT MARKINGS THAT ARE DUPLICATED OR CONTRARY TO THESE PLANS.






REVISION DATES


NO.	DATE	DESCRIPTION

GENERAL NOTES
TOWN OF TYRONE
2022 ROADWAY RESURFACING

CHECKED:	DATE:	DRAWING No.
BACKCHECKED:	DATE:	04-0001
CORRECTED:	DATE:	
VERIFIED:	DATE:	

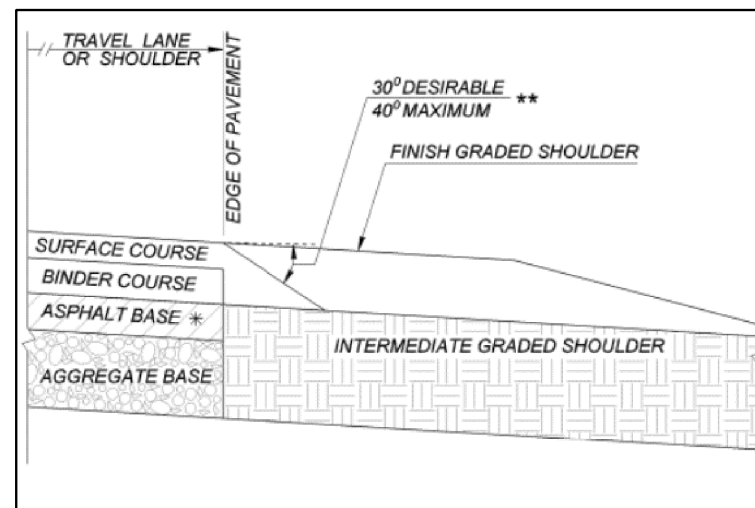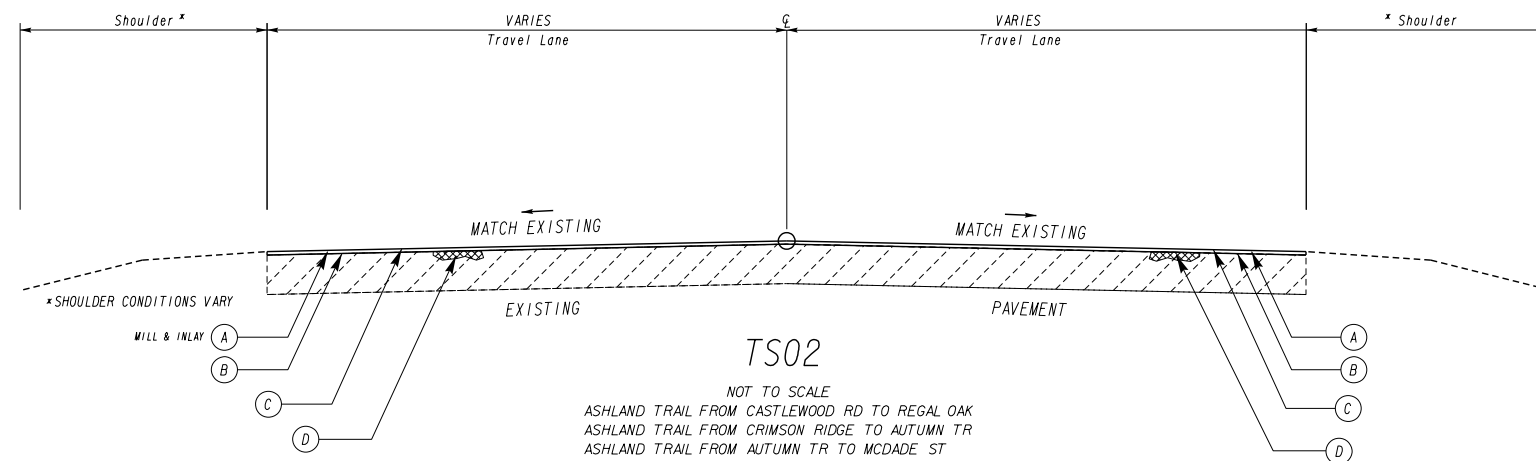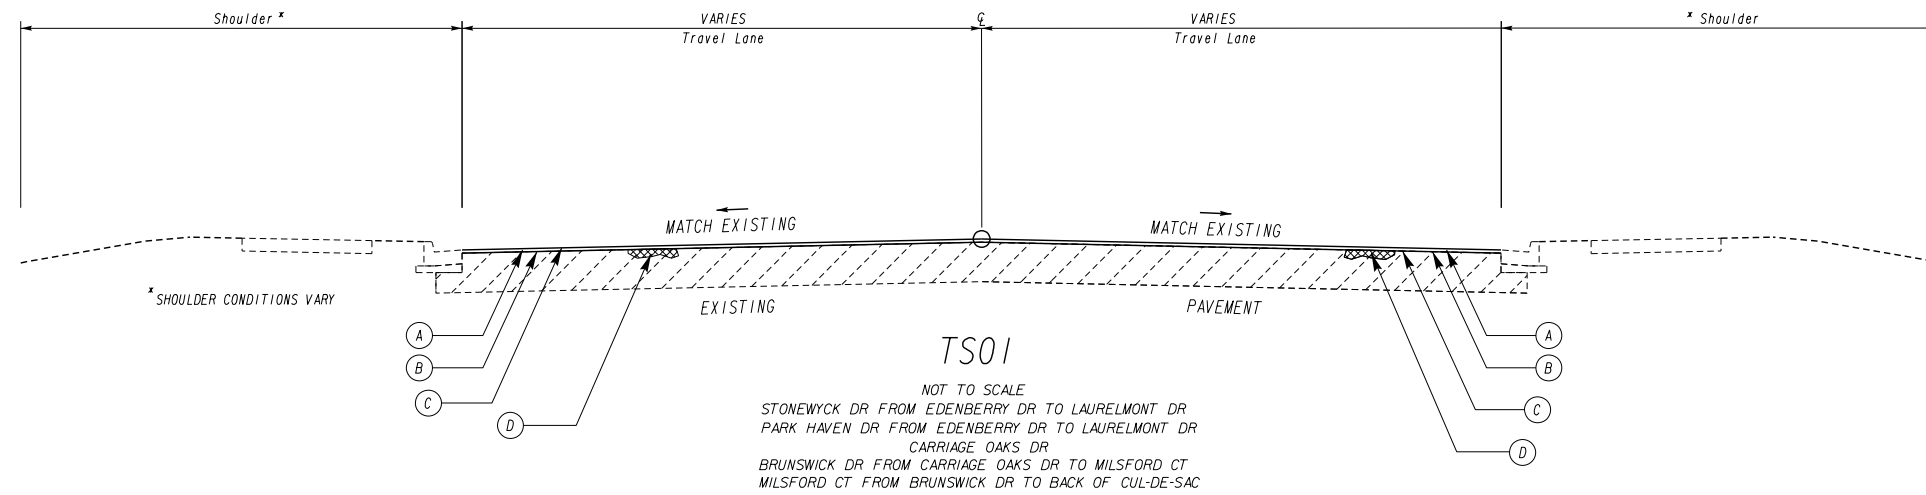

PAVEMENT EDGE TREATMENT FOR ASPHALT - RURAL SECTION

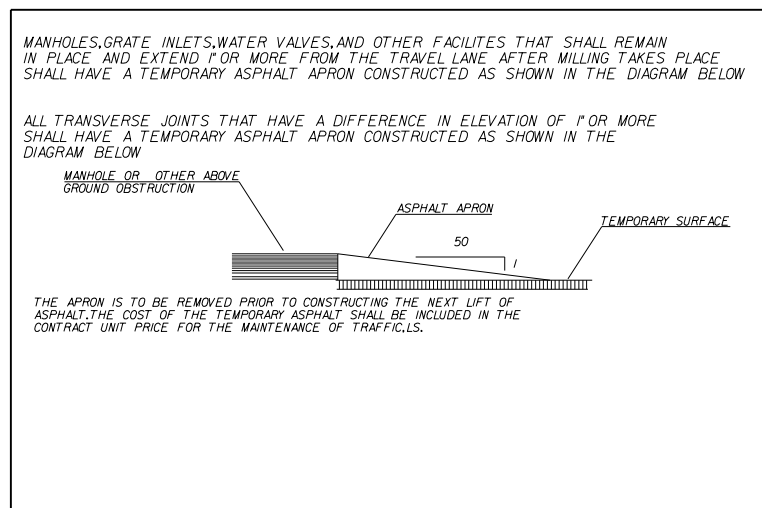

TEMPORARY ASPHALT APRON DETAIL

- (A) - RECYCLED ASPH CONC 12.5 mm SUPERPAVE, GP 2 ONLY, INCL BITUM MATL & H LIME - 275 LBS/SY
- (B) - BITUMUS TACK COAT
- (C) - MILL ASPH CONC PVMT 2.5 INCH DEPTH
- (D) - DEEP PVMT PATCHING, 25 mm SUPERPAVE, 440 LBS/SY, (AS NEEDED AND AS DIRECTED BY ENGINEER)

SUMMARY OF QUANTITIES

THERMOPLASTIC STRIPING QUANTITIES			
PAY ITEMS	DESCRIPTION	UNITS	QTY
653-1502	THERMOPLASTIC SOLID TRAF STRIPE, 5 IN, YELLOW	LF	315
653-6006	THERMOPLASTIC TRAF STRIPING, YELLOW	SY	128
653-1704	THERMOPLASTIC SOLID TRAF STRIPE, 24 IN, WHITE	LF	200
654-1001	RAISED PAVEMENT MARKERS TP 1	EA	20

ROADWAY QUANTITIES		
402-3130 RECYCL AC 12.5 MM SP, GP2 ONLY, INCL BM & HL	413-0750 TACK COAT	432-0210 MILL ASPH CONC PVMT, 2 1/2 IN DEPTH
TN 1,444	GL 1,272	SY 12,719

TRAFFIC CONTROL		
PAY ITEM	UNITS	QTY
150-1000	LS	1

GRADING COMPLETE		
PAY ITEM	UNITS	QTY
210-0100	LS	1

BID ALTERNATIVE #1		
RECYCL AC PATCHING, INCL BM & HL		
PAY ITEM	UNITS	QTY
402-1802	TN	67



REVISION DATES

SUMMARY QUANTITIES
TOWN OF TYRONE
2022 ROADWAY RESURFACING

CHECKED:	DATE:	DRAWING No.
BACKCHECKED:	DATE:	06-0001
CORRECTED:	DATE:	
VERIFIED:	DATE:	



NOTES

- CONTRACTOR SHALL USE ASPHALT PATCHING TO REPAIR ASPHALT PRIOR TO INSTALLATION OF SURFACE COURSE. IF NEEDED, SEE SHEET 06-0001 FOR INFORMATION REGARDING BID ALTERNATIVE *1.
- CONTRACTOR SHALL ENSURE SMOOTH ROADWAY TRANSITION AROUND MANHOLES AND VALVES. TOP OF FINISHED ASPHALT SURFACE COURSE SHALL BE FLUSH/LEVEL WITH MANHOLES AND VALVES.

PROPERTY AND EXISTING R/W LINE	---
REQUIRED R/W LINE	---
CONSTRUCTION LIMITS	---
EXISTING PAVEMENT CRACKING AND CHIPPING	▨
EXISTING PAVEMENT ELEVATION DIFFERENCE	▧
EXISTING SHOULDER CRACKING	▩

BEGIN LIMIT OF ACCESS.....BLA	---
END LIMIT OF ACCESS.....ELA	---
LIMIT OF ACCESS	---
REQ'D R/W & LIMIT OF ACCESS	---
TREE PROTECTION / LIMITS OF DISTURBANCE FENCING	●



REVISION DATES	



CONSTRUCTION PLAN		
TOWN OF TYRONE		
2022 ROADWAY RESURFACING		
CHECKED:	DATE:	DRAWING No. 13-0001
BACKCHECKED:	DATE:	
CORRECTED:	DATE:	
VERIFIED:	DATE:	



NOTES

1. CONTRACTOR SHALL USE ASPHALT PATCHING TO REPAIR ASPHALT PRIOR TO INSTALLATION OF SURFACE COURSE, IF NEEDED. SEE SHEET 06-0001 FOR INFORMATION REGARDING BID ALTERNATIVE *1.
2. CONTRACTOR SHALL ENSURE SMOOTH ROADWAY TRANSITION AROUND MANHOLES AND VALVES. TOP OF FINISHED ASPHALT SURFACE COURSE SHALL BE FLUSH/LEVEL WITH MANHOLES AND VALVES.

PROPERTY AND EXISTING R/W LINE
REQUIRED R/W LINE
CONSTRUCTION LIMITS
EXISTING PAVEMENT CRACKING AND CHIPPING
EXISTING PAVEMENT ELEVATION DIFFERENCE
EXISTING SHOULDER CRACKING

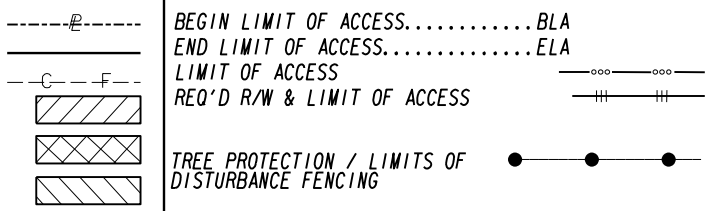

REVISION DATES	

CONSTRUCTION PLAN
TOWN OF TYRONE
2022 ROADWAY RESURFACING

CHECKED:	DATE:	DRAWING No.
BACKCHECKED:	DATE:	13-0002
CORRECTED:	DATE:	
VERIFIED:	DATE:	




MATCH LINE
SEE SHEET 13-0004

NOTES

- CONTRACTOR SHALL USE ASPHALT PATCHING TO REPAIR ASPHALT PRIOR TO INSTALLATION OF SURFACE COURSE, IF NEEDED. SEE SHEET 06-0001 FOR INFORMATION REGARDING BID ALTERNATIVE *I.
- CONTRACTOR SHALL ENSURE ALL PAVING IN RURAL SECTIONS FOLLOW GDOT DETAIL P-7 - PAVEMENT EDGE TREATMENT ASPHALT AND CONCRETE PAVEMENT. SEE SHEET 05-0001 FOR DETAILS. ANY ADDITIONAL ASPHALT AND/OR FILL DIRT NEEDED SHALL BE INCLUDED IN OVERALL COST OF ASPHALT. FILL DIRT SHALL BE ADDED, AS NEEDED, AND ALL DISTURBED AREAS SHALL BE COVERED WITH SOD (MATCH IN KIND). PAYMENT FOR FILL DIRT AND SOD SHALL BE INCLUDED IN PAY ITEM 210-0100 GRADING COMPLETE.

PROPERTY AND EXISTING R/W LINE	-----e-----
REQUIRED R/W LINE	-----
CONSTRUCTION LIMITS	---G---F---
EXISTING PAVEMENT CRACKING AND CHIPPING	
EXISTING PAVEMENT ELEVATION DIFFERENCE	
EXISTING SHOULDER CRACKING	

BEGIN LIMIT OF ACCESS.....BLA	
END LIMIT OF ACCESS.....ELA	
LIMIT OF ACCESS	
REQ'D R/W & LIMIT OF ACCESS	
TREE PROTECTION / LIMITS OF DISTURBANCE FENCING	



REVISION DATES	

CONSTRUCTION PLAN			
TOWN OF TYRONE			
2022 ROADWAY RESURFACING			
CHECKED:	DATE:	DRAWING No.	
BACKCHECKED:	DATE:	13-0003	
CORRECTED:	DATE:		
VERIFIED:	DATE:		



MATCH LINE
SEE SHEET 13-0003

MATCH LINE
SEE SHEET 13-0005

NOTES

1. CONTRACTOR SHALL USE ASPHALT PATCHING TO REPAIR ASPHALT PRIOR TO INSTALLATION OF SURFACE COURSE, IF NEEDED. SEE SHEET 06-0001 FOR INFORMATION REGARDING BID ALTERNATIVE *1.
2. CONTRACTOR SHALL ENSURE SMOOTH ROADWAY TRANSITION AROUND MANHOLES AND VALVES. TOP OF FINISHED ASPHALT SURFACE COURSE SHALL BE FLUSH/LEVEL WITH MANHOLES AND VALVES.

PROPERTY AND EXISTING R/W LINE	-----e-----
REQUIRED R/W LINE	-----
CONSTRUCTION LIMITS	---G---F---
EXISTING PAVEMENT CRACKING AND CHIPPING	
EXISTING PAVEMENT ELEVATION DIFFERENCE	
EXISTING SHOULDER CRACKING	

BEGIN LIMIT OF ACCESS.....BLA	-----o-----
END LIMIT OF ACCESS.....ELA	-----o-----
LIMIT OF ACCESS	-----o-----
REQ'D R/W & LIMIT OF ACCESS	-----o-----
TREE PROTECTION / LIMITS OF DISTURBANCE FENCING	●-----●-----●





REVISION DATES	

CONSTRUCTION PLAN			
TOWN OF TYRONE			
2022 ROADWAY RESURFACING			
CHECKED:	DATE:	DRAWING No.	
BACKCHECKED:	DATE:	13-0004	
CORRECTED:	DATE:		
VERIFIED:	DATE:		

MATCH LINE
SEE SHEET 13-0004




PROPERTY AND EXISTING R/W LINE
 REQUIRED R/W LINE
 CONSTRUCTION LIMITS
 EXISTING PAVEMENT CRACKING
 AND CHIPPING
 EXISTING PAVEMENT
 ELEVATION DIFFERENCE
 EXISTING SHOULDER
 CRACKING

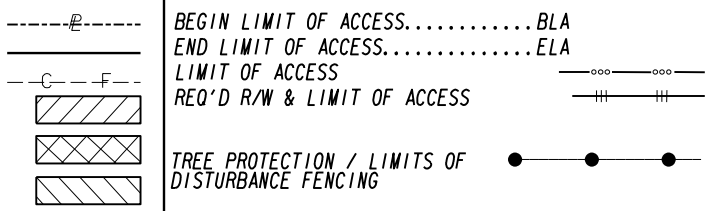

REVISION DATES	

CONSTRUCTION PLAN			
TOWN OF TYRONE			
2022 ROADWAY RESURFACING			
CHECKED:	DATE:	DRAWING No.	
BACKCHECKED:	DATE:	13-0005	
CORRECTED:	DATE:		
VERIFIED:	DATE:		

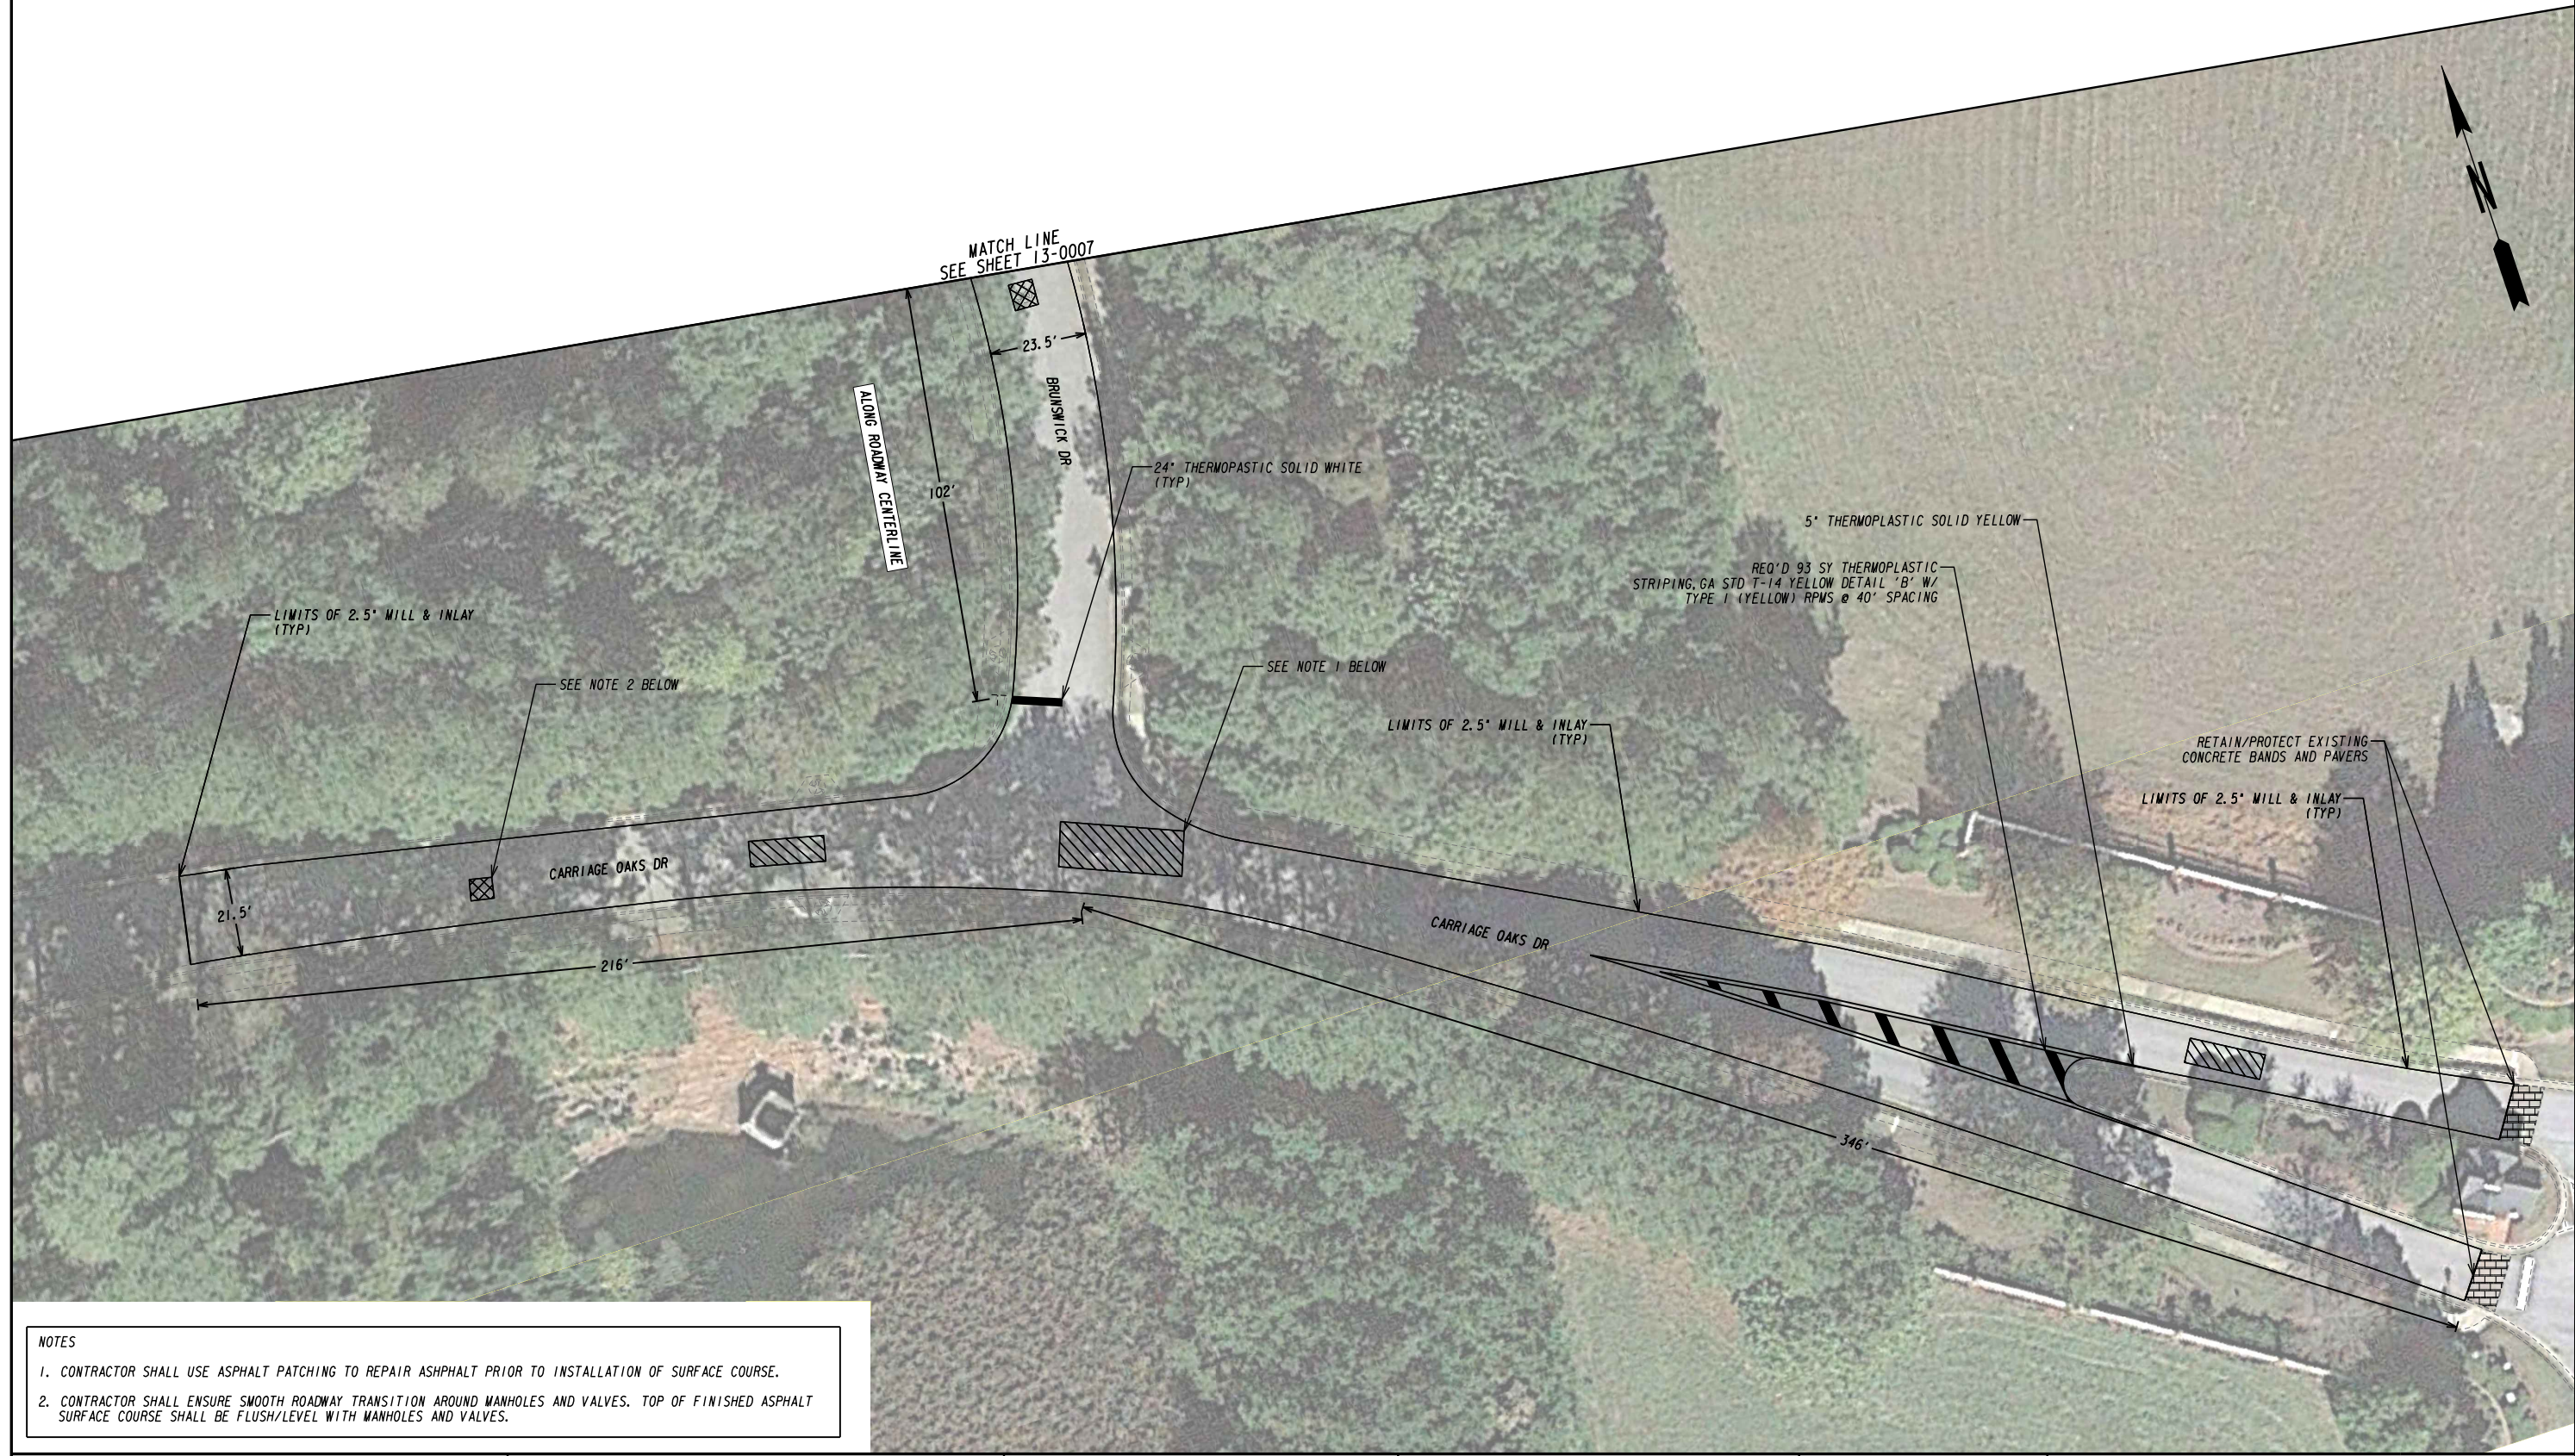


NOTES

1. CONTRACTOR SHALL USE ASPHALT PATCHING TO REPAIR ASPHALT PRIOR TO INSTALLATION OF SURFACE COURSE.
2. CONTRACTOR SHALL ENSURE SMOOTH ROADWAY TRANSITION AROUND MANHOLES AND VALVES. TOP OF FINISHED ASPHALT SURFACE COURSE SHALL BE FLUSH/LEVEL WITH MANHOLES AND VALVES.

PROPERTY AND EXISTING R/W LINE	-----e-----
REQUIRED R/W LINE	-----
CONSTRUCTION LIMITS	---G---F---
EXISTING PAVEMENT CRACKING AND CHIPPING	[Hatched Box]
EXISTING PAVEMENT ELEVATION DIFFERENCE	[Cross-hatched Box]
EXISTING SHOULDER CRACKING	[Diagonal Hatched Box]

BEGIN LIMIT OF ACCESS.....BLA	---o---o---
END LIMIT OF ACCESS.....ELA	---o---o---
LIMIT OF ACCESS	---o---o---
REQ'D R/W & LIMIT OF ACCESS	---o---o---
TREE PROTECTION / LIMITS OF DISTURBANCE FENCING	●---●---●


POND
Architects ■ Engineers ■ Planners

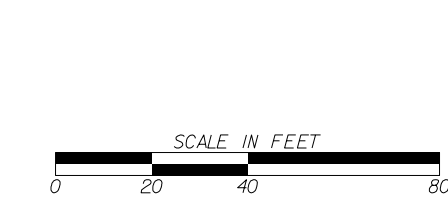

REVISION DATES	

CONSTRUCTION PLAN
TOWN OF TYRONE
2022 ROADWAY RESURFACING

CHECKED:	DATE:	DRAWING No.
BACKCHECKED:	DATE:	13-0006
CORRECTED:	DATE:	
VERIFIED:	DATE:	




MATCH LINE
SEE SHEET 13-0008

MATCH LINE
SEE SHEET 13-0006

- NOTES**
1. CONTRACTOR SHALL USE ASPHALT PATCHING TO REPAIR ASPHALT PRIOR TO INSTALLATION OF SURFACE COURSE.
 2. CONTRACTOR SHALL ENSURE SMOOTH ROADWAY TRANSITION AROUND MANHOLES AND VALVES. TOP OF FINISHED ASPHALT SURFACE COURSE SHALL BE FLUSH/LEVEL WITH MANHOLES AND VALVES.


PROPERTY AND EXISTING R/W LINE	-----e-----
REQUIRED R/W LINE	-----
CONSTRUCTION LIMITS	---G---F---
EXISTING PAVEMENT CRACKING AND CHIPPING	[Hatched Box]
EXISTING PAVEMENT ELEVATION DIFFERENCE	[Cross-hatched Box]
EXISTING SHOULDER CRACKING	[Diagonal Hatched Box]

BEGIN LIMIT OF ACCESS.....BLA	---o---o---
END LIMIT OF ACCESS.....ELA	---o---o---
LIMIT OF ACCESS	---o---o---
REQ'D R/W & LIMIT OF ACCESS	---o---o---
TREE PROTECTION / LIMITS OF DISTURBANCE FENCING	●---●---●



REVISION DATES	

CONSTRUCTION PLAN			
TOWN OF TYRONE			
2022 ROADWAY RESURFACING			
CHECKED:	DATE:	DRAWING No.	
BACKCHECKED:	DATE:	13-0007	
CORRECTED:	DATE:		
VERIFIED:	DATE:		



MATCH LINE
SEE SHEET 13-0007

- NOTES**
1. CONTRACTOR SHALL USE ASPHALT PATCHING TO REPAIR ASPHALT PRIOR TO INSTALLATION OF SURFACE COURSE.
 2. CONTRACTOR SHALL ENSURE SMOOTH ROADWAY TRANSITION AROUND MANHOLES AND VALVES. TOP OF FINISHED ASPHALT SURFACE COURSE SHALL BE FLUSH/LEVEL WITH MANHOLES AND VALVES.

PROPERTY AND EXISTING R/W LINE	-----e-----
REQUIRED R/W LINE	-----
CONSTRUCTION LIMITS	---C---F---
EXISTING PAVEMENT CRACKING AND CHIPPING	[Hatched Box]
EXISTING PAVEMENT ELEVATION DIFFERENCE	[Cross-hatched Box]
EXISTING SHOULDER CRACKING	[Diagonal Hatched Box]

BEGIN LIMIT OF ACCESS.....BLA	-----
END LIMIT OF ACCESS.....ELA	-----
LIMIT OF ACCESS	---o---o---
REQ'D R/W & LIMIT OF ACCESS	--- --- ---
TREE PROTECTION / LIMITS OF DISTURBANCE FENCING	●-----●



REVISION DATES	

CONSTRUCTION PLAN			
TOWN OF TYRONE			
2022 ROADWAY RESURFACING			
CHECKED:	DATE:	DRAWING No.	
BACKCHECKED:	DATE:	13-0008	
CORRECTED:	DATE:		
VERIFIED:	DATE:		